

Recom Rotary Switches

of wiping contacts design
suitable for
AC & DC application in
2, 4, 6, 8 & 12 positions
5, 10, 16, 25, 32, 40, 63 & 125 Amps.
at 440V. AC & DC

Conforms to IS 13947 (Part 3) : 1993

IEC PUB. 947 - 3 (1990)

Superseding IS 4064 (Part 1)

Utilization Category AC - 22A



- ★ A. C. Switches are with Slow Breaker & Quick make mechanism.
- ★ D. C. Switches are with quick make quick and Break mechanism

C.A.C.T.
approved for
use in
tele
communication



Small Frame
2, 4, 6 & 8
Posi. DC

**125 Amps. 3 Pole off/on Rotary Switch with
Recessed yellow cup & Red Toggle Knob
for Pad locking
Universal Mounting**

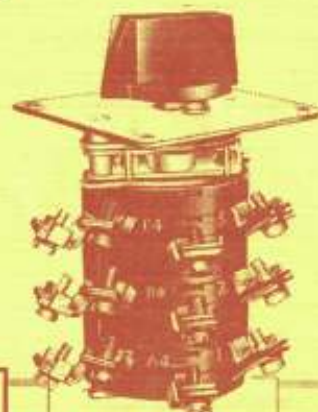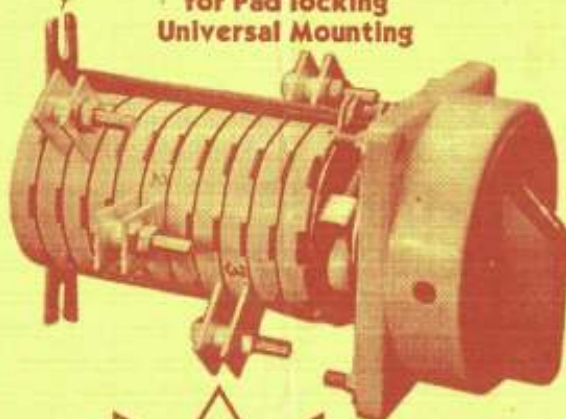

Large Frame
2, 4, 6 & 8
Posi. AC



Large Frame
2, 4, 6 & 8
Posi. DC

**Tested &
Certified by
Short Circuit
Testing Lab
at C.P.R.I
to AC-22A UTLN.
Category**

**Small Frame 2, 4, 6 & 8
posi. AC
fitted with Tee Lock
Assembly**



12 Posi. Large Frame AC

**Conform
to
Defence
Specification**



12 Posi. Small Frame AC

★ ALL A. C. SWITCHES ARE SUITABLE FOR D. C. UPTO 28 V RES.

GENERAL

RECOM range of Rotary Switches incorporate wiping contact design concept to meet reliable standards for arduous industrial applications. These are basically designed for manual operation and essentially recommended for ON-LOAD switching of resistive and inductive circuits. This design permits infinite combination of circuits, variety of attachments and accessories to meet any standard & non-standard speciation. RECOM Rotary Switches are widely used for isolation, selection, control and auxiliary switching, in Control Panels, Switch Boards, Cubicles, Control Desks, Motor Control Centres, Machine Tools, electrical equipments etc.

CONSTRUCTION :

Based on packet principle, switches incorporate air-break type wiping contacts operating on rotary action thus making and breaking the required circuit between fixed and moving contacts, manufactured out of specially selected contact materials and housed in anti-tracking quality moulded packets. Moving Contacts are operated through an insulated spindle by means of a positive indexing mechanism, while Fixed Contacts are positioned in the packets. This complete assembly of Contacts and Mechanism is manually rotated with suitable handle.

MECHANISM

Rotary Switches are manufactured with 2 Two Types of Mechanisms a) Quick Make/Slow Break action for AC circuits b) Quick Make/Quick Break action for DC circuits which is independent of the action of the operator.

SPECIFICATION :

RECOM Rotary Switches comply with IS 13947 (Pt 3):1993 utin. cat. AC-22A ISS 4064 Pt. 1-1978, IEC 408 & Defence Specification JSS 51208, RCS 156.

H.V. Test :

Each switch is tested to withstand H. V. test of 2.5 KV for one minute.

TEMPERATURE :

Switches are recommended to be used under temperatures upto 50°C Ambient.

GUARANTEE :

Each RECOM Switch carry with it a guarantee against manufacturing defects and faulty workmanship for a period of 12 months from the date of purchase.

ROTARY SWITCHES

4 POSITION 90° 250-440V AC PANEL MOUNTING

POLE	SWITCHING SEQUENCE	10 AMP	DIM L	16 AMP	DIM L	25 AMP	DIM L	40 AMP	DIM L	63 AMP	DIM L
1	OFF-ON	—	—	PA2116	38	PA3125	44	PA2140	53	PA3163	63
2		—	—	PA3216	44	PA5225	56	PA3240	63	PA5263	84
3		PA4310	50	PA4316	70	PA7325	94	PA4340	74	PA7363	104
4		PA5410	56	PA5416	78	PA9425	110	PA5440	84	PA9463	125
1	2 WAY	—	—	PA3116A	44	PA3125A	44	PA3140A	63	PA3163A	63
2		—	—	PA5216A	56	PA5225A	56	PA5240A	84	PA5263A	84
3		PA7310A	68	PA7316A	94	PA7325A	94	PA7340A	104	PA7363A	104
4		PA9410A	80	PA9416A	110	PA9425A	110	PA9440A	125	PA9463A	125
1	2 WAY + OFF	—	—	PA3116B	44	PA5125B	56	PA3140B	63	PA5163B	84
2		—	—	PA5216B	56	PA9225B	80	PA5240B	84	PA9263B	125
3		PA7310B	68	PA7316B	94	PA13325B	142	PA7340B	104	PA13363B	166
4		PA9410B	80	PA9416B	110	—	—	PA9440B	125	PA17463B	207
1	3 WAY + OFF	—	—	PA3116C	44	PA5125C	56	PA3140C	63	PA5163C	84
2		—	—	PA6216C	62	PA9225C	80	PA6240C	94	PA9263C	125
3		PA9310C	80	PA9316C	110	PA13325C	142	PA9340C	125	PA13363C	166
4		PA12410C	98	PA12416C	134	—	—	PA12440C	155	PA17463C	207
1	4 WAY	—	—	PA3116D	44	PA5125D	56	PA3140D	63	PA5163D	84
2		—	—	PA6216D	62	PA9225D	80	PA6240D	94	PA9263D	125
3		PA9310D	80	PA9316D	110	PA13325D	142	PA9340D	125	PA13363D	166
4		PA12410D	98	PA12416D	134	—	—	PA12440D	155	PA17463D	207

ROTARY SWITCHES

4 POSITION 90° 250-440V AC/DC PANEL MOUNTING

POLE	SWITCHING SEQUENCE	10 AMP	DIM L	16 AMP	DIM L	25 AMP	DIM L	40 AMP	DIM L	63 AMP	DIM L
1	OFF-ON	—	—	PD2116	51	PD3125	57	PD2140	61	PD3163	71
2		—	—	PD3216	57	PD5225	69	PD3240	71	PD5263	92
3		PD4310	63	PD4316	83	PD8325/LM	116	PD4340	82	PD7363	112
4		PD5410	69	PD5416	91	PD10425/LM	132	PD5440	92	PD9463	133
1	2 WAY	—	—	PD3116A	57	PD3125A	57	PD3140A	71	PD3163A	71
2		—	—	PD5216A	69	PD5225A	69	PD5240A	92	PD5263A	92
3		PD8310A/LM	88	PD8316A/LM	116	PD8325A/LM	116	PD7340A	112	PD7363A	112
4		PD10410A/LM	100	PD10416A/LM	132	PD10425A/LM	132	PD9440A	133	PD9463A	133
1	2 WAY + OFF	—	—	PD3116B	57	PD5125B	69	PD3140B	71	PD5163B	92
2		—	—	PD5216B	69	PD10225B/LM	100	PD5204B	92	PD9263B	133
3		PD8310B/LM	88	PD8316B/LM	116	PD14325B/LM	164	PD7340B	112	PD13363B	174
4		PD10410B/LM	100	PD10416B/LM	132	—	—	PD9440B	133	—	—
1	3 WAY + OFF	—	—	PD3116C	57	PD5125C	69	PD3140C	71	PD5163C	92
2		—	—	PD7216C/LM	75	PD10225C/LM	100	PD6240C	102	PD9263C	133
3		PD10310C/LM	100	PD10316C/LM	132	PD14325C/LM	164	PD9340C	133	PD13363C	174
4		PD13410C/LM	118	PD13416C/LM	156	—	—	PD12440C	163	—	—
1	4 WAY	—	—	PD3116D	57	PD5125D	69	PD3140D	71	PD5163D	92
2		—	—	PD7216D/LM	75	PD10225D/LM	100	PD6240D	102	PD9263D	133
3		PD10310D/LM	100	PD10316D/LM	132	PD14325D/LM	164	PD9340D	133	PD13363D	174
4		PD13410D/LM	118	PD13416D/LM	156	—	—	PD12440D	163	—	—

ALSO AVAILABLE 125 AMPS ROTARY SWITCHES FOR ON-OFF, 2 WAY, CHANGEOVER CENTRE OFF SWITCHING SEQUENCES IN MULTI POLES WITH UNIVERSAL MOUNTING. DETAILS ON REQUEST. ABOVE RANGE A. C. SWITCHES ARE ALSO SUITABLE FOR D. C. UPTO 28 V RES.

125 A 4 POSN. 90° 250-440V. AC ONLY PANEL & UNIVERSAL MOUNTING

POLES	SW. SEQ.	SWITCH CODE	DIM L	SW. SEQ.	SWITCH CODE	DIM L	SW. SEQ.	SWITCH CODE	DIM L
1	OFF-ON	PA51 125	84	CHANGE OVER	PA 51 125 A	84	CHANGE OVER	PA71 125 B	94
10	OFF-ON	PA99 125	115	NO OFF	PA 99 125 A	115	WITH OFF	PA 122 125 B	155
10	OFF-ON	XA113 125	195		XA 113 125 A	195		XA173 125 B	205

125 A 4 POSN. 90° 250-440V. AC/DC PANEL & UNIVERSAL MOUNTING

POLES	SW. SEQ.	SWITCH CODE	DIM L	SW. SEQ.	SWITCH CODE	DIM L	SW. SEQ.	SWITCH CODE	DIM L
1	OFF-ON	PD51 125	92	CHANGE OVER	PD 51 125 A	92	CHANGE OVER	PD71 125 B	112
10	OFF-ON	PD99 125	122	NO OFF	PD 99 125 A	123	WITH OFF	PD122 125 B	153
10	OFF-ON	XD113 125	154		XD 113 125 A	154		XD173 125 B	215

6 POSITION 60° AC ONLY PANEL MOUNTING

POLES	SW. SEQ.	10 AMP	DIM L	20 AMP	DIM L	32 AMP	DIM L	63 AMP	DIM L
1	5 WAY + OFF	PA4110EO	58	PA7220EO	82	PA4132EO	74	PA7163EO	105
10		PA8210EO	90	PA14220EO	140	PA8232EO	115	PA14263EO	176
10		PA12310EO	124	PA21320EO/P	208	PA12332EO	156	PA21363EO/P	256
1	6 WAY	PA4110F	58	PA7120F	82	PA4132F	74	PA7163F	105
10		PA8210F	90	PA14220F	140	PA8232F	115	PA14263F	176
10		PA12310F	124	PA21320F/P	208	PA12332F	156	PA21363F/P	256

ROTARY SWITCHES 6 POSITION 60° AC/DC PANEL MOUNTING

POLES	SW. SEQ.	10 AMP	DIM L	20 AMP	DIM L	32 AMP	DIM L	63 AMP	DIM L
1	5 WAY + OFF	PD4110EO	58	PD7220EO	82	PD4132EO	74	PD7163EO	105
10		PD8210EO	90	PD14220EO	140	PD8232EO	115	PD14263EO	176
10		PD12310EO	124	PD21320EO/P	208	PD12332EO	156	PD21363EO/P	256
1	6 WAY	PD4110F	58	PD7120F	82	PD4132F	74	PD7163F	105
10		PD8210F	90	PD14220F	140	PD8232F	115	PD14263F	176
10		PD12310F	124	PD21320F/P	208	PD12332F	156	PD21363F/P	256

ROTARY SWITCHES 8 POSITION 45° AC ONLY PANEL MOUNTING

POLES	SW. SEQ.	10 AMP	DIM L	20 AMP	DIM L	32 AMP	DIM L	63 AMP	DIM L
1	7 WAY + OFF	PA5110GO	66	PA9120GO	98	PA5132GO	84	PA9163GO	125
10		PA9210GO	98	PA17220GO/P	174	PA9232GO	125	PA17263GO/P	206
10		PA13310GO	132	PA25320GO/P	240	PA13332GO	166	PA25363H/P	296
1	8 WAY	PA5110H	66	PA9120H	98	PA5132H	84	PA9163H	125
10		PA9210H	98	PA17220H/P	174	PA9232H	125	PA17263H/P	207
10		PA13310H	132	PA25320H/P	240	PA13332H	166	PA25363H/P	296

ROTARY SWITCHES 8 POSITION 45° AC/DC PANEL MOUNTING

POLES	SW. SEQ.	10 AMP	DIM L	20 AMP	DIM L	32 AMP	DIM L	63 AMP	DIM L
1	7 WAY + OFF	PD5110GO	66	PD9120GO	98	PD5132GO	84	PD9163GO	125
10		PD9210GO	98	PD17220GO/P	174	PD9232GO	125	PD17263GO/P	206
10		PD13310GO	132	PD25320GO/P	240	PD13332GO	166	PD25363H/P	296
1	8 WAY	PD5110H	66	PD9120H	98	PD5132H	84	PD9163H	125
10		PD9210H	98	PD17220H/P	174	PD9232H	125	PD17263H/P	207
10		PD13310H	132	PD25320H/P	240	PD13332H	166	PD25363H/P	296

ROTARY SWITCHES 12 POSITION 30° AC ONLY PANEL MOUNTING

POLES	SW. SEQ.	5 AMP	DIM L	10 AMP	DIM L	16 AMP	DIM L	25 AMP	DIM L
1	11 WAY + OFF	PA315LO	50	PA5110LO	66	PA3116LO	64	PA5125LO	84
2		PA525LO	66	PA9210LO	98	PA5216LO	84	PA9225LO	125
1	12 WAY	PA315M	50	PA5110M	66	PA3116M	64	PA5125M	84
2		PA525M	66	PA9210M	98	PA5216M	84	PA9225M	125

★ 125 A 3 Way-Off & 4 Way No - Off Switches Available on request.



INDICATING PLATES

Black Background White Letters



Size
50 x 50mm. Sq.
for 10-16-20 Amp.
4-6-8 & 12
Position Switches



Size
75 x 75mm. Sq.
for 10-16-20-25 Amp.
4-6-8
Position Switches



Size
95 x 95mm. Sq.
for 32-40-63 &
125 Amp.
4-6-8 Position &
Large Mechanism
Switches



Size
95 x 95mm. Sq.
with 36 Ø Hole for
10 to 125 Amp.
Switches with
Locks & Interlocks

TYPICAL ILLUSTRATIONS



125 Amp. Rotary Switch
Universal Mounting

Door Interlock (D)



Panel Mounting (P)

Centre Key Lock (CKL)
Lever & Tee Type



Base Mounting (F)

Large Mechanism
Pistol Grip Handle (M)




5 Amp. AC
Small Frame
12 Posi.
Rotary Switch




16 Amps. AC Large
Frame 12 Posi.
Rotary Switch

SWITCHING DIAGRAM


OFF-ON

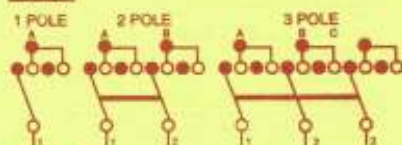


2 WAY

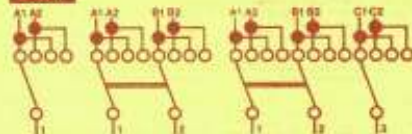


2 WAY+OFF

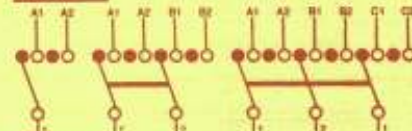


3 WAY-OFF

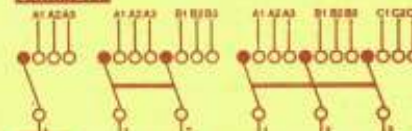


4 WAY

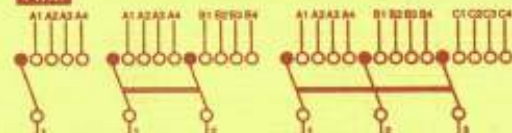


5 WAY+OFF




6 WAY NO OFF



7 WAY+OFF

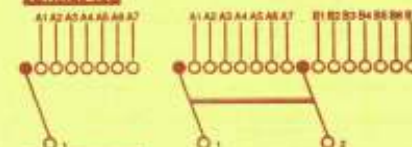

8 WAY NO OFF

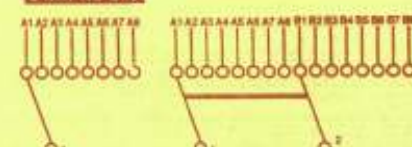

11 WAY+OFF



12 WAY NO OFF



TYPICAL ILLUSTRATION'S

16 Amps. Rotary Switch
Fitted with 78 x 78mm
Escutcheon & Toggle Knob



125 Amps. Single Pole 4 way
NO Off Rotary Switch
Fitted with Toggle Knob
and 95x95mm. Emb. Ind. Plate



Small Frame 10 Amp.
6/8 Posl. AC/ DC
Rotary Switch



16 Amps. AC AUTO/ MANUAL Switch
Fitted with TEE Type centre key
Lock Assembly



16 Amps DC Local/ Remote Switch
Fitted with Lever Type
Centre Key Lock Assembly



125 Amps Single Pole
change over NO OFF
Rotary Switch Fitted with
Toggle Knob



Large Frame Spring Return Type
Rotary Switch For
Breaker Control application
fitted with EE Pistol Grip Handle



63 Amps. Large Frame
AC Rotary Switch
Fitted with Lever Type
centre key Lock Assembly

STD. INDICATING PLATE MARKINGS


OFF ON	1 2	OFF 2	OFF 3	1 4	OFF 5
ON	1	OFF 1	2	2	1
OFF	2	OFF	1	3	2
1	2	1	2	4	3
2	3	2	3	5	4
3	4	3	4	6	5
4	5	4	5	7	6
5	6	5	6	8	7
6	7	6	7	9	8
7	8	7	8	10	9
8	9	8	9	11	10
9	10	9	10	12	11
10	11	10	11	13	12
11	12	11	12	14	13
12	13	12	13	15	14
13	14	13	14	16	15
14	15	14	15	17	16
15	16	15	16	18	17
16	17	16	17	19	18
17	18	17	18	20	19
18	19	18	19	21	20
19	20	19	20	22	21
20	21	20	21	23	22
21	22	21	22	24	23
22	23	22	23	25	24
23	24	23	24	26	25
24	25	24	25	27	26
25	26	25	26	28	27
26	27	26	27	29	28
27	28	27	28	30	29
28	29	28	29	31	30
29	30	29	30	32	31
30	31	30	31	33	32
31	32	31	32	34	33
32	33	32	33	35	34
33	34	33	34	36	35
34	35	34	35	37	36
35	36	35	36	38	37
36	37	36	37	39	38
37	38	37	38	40	39
38	39	38	39	41	40
39	40	39	40	42	41
40	41	40	41	43	42
41	42	41	42	44	43
42	43	42	43	45	44
43	44	43	44	46	45
44	45	44	45	47	46
45	46	45	46	48	47
46	47	46	47	49	48
47	48	47	48	50	49
48	49	48	49	51	50
49	50	49	50	52	51
50	51	50	51	53	52
51	52	51	52	54	53
52	53	52	53	55	54
53	54	53	54	56	55
54	55	54	55	57	56
55	56	55	56	58	57
56	57	56	57	59	58
57	58	57	58	60	59
58	59	58	59	61	60
59	60	59	60	62	61
60	61	60	61	63	62
61	62	61	62	64	63
62	63	62	63	65	64
63	64	63	64	66	65
64	65	64	65	67	66
65	66	65	66	68	67
66	67	66	67	69	68
67	68	67	68	70	69
68	69	68	69	71	70
69	70	69	70	72	71
70	71	70	71	73	72
71	72	71	72	74	73
72	73	72	73	75	74
73	74	73	74	76	75
74	75	74	75	77	76
75	76	75	76	78	77
76	77	76	77	79	78
77	78	77	78	80	79
78	79	78	79	81	80
79	80	79	80	82	81
80	81	80	81	83	82
81	82	81	82	84	83
82	83	82	83	85	84
83	84	83	84	86	85
84	85	84	85	87	86
85	86	85	86	88	87
86	87	86	87	89	88
87	88	87	88	90	89
88	89	88	89	91	90
89	90	89	90	92	91
90	91	90	91	93	92
91	92	91	92	94	93
92	93	92	93	95	94
93	94	93	94	96	95
94	95	94	95	97	96
95	96	95	96	98	97
96	97	96	97	99	98
97	98	97	98	100	99
98	99	98	99	101	100
99	100	99	100	102	101
100	101	100	101	103	102
101	102	101	102	104	103
102	103	102	103	105	104
103	104	103	104	106	105
104	105	104	105	107	106
105	106	105	106	108	107
106	107	106	107	109	108
107	108	107	108	110	109
108	109	108	109	111	110
109	110	109	110	112	111
110	111	110	111	113	112
111	112	111	112	114	113
112	113	112	113	115	114
113	114	113	114	116	115
114	115	114	115	117	116
115	116	115	116	118	117
116	117	116	117	119	118
117	118	117	118	120	119
118	119	118	119	121	120
119	120	119	120	122	121
120	121	120	121	123	122
121	122	121	122	124	123
122	123	122	123	125	124
123	124	123	124	126	125
124	125	124	125	127	126
125	126	125	126	128	127
126	127	126	127	129	128
127	128	127	128	130	129
128	129	128	129	131	130
129	130	129	130	132	131
130	131	130	131	133	132
131	132	131	132	134	133
132	133	132	133	135	134
133	134	133	134	136	135
134	135	134	135	137	136
135	136	135	136	138	137
136	137	136	137	139	138
137	138	137	138	140	139
138	139	138	139	141	140
139	140	139	140	142	141
140	141	140	141	143	142
141	142	141	142	144	143
142	143	142	143	145	144
143	144	143	144	146	145
144	145	144	145	147	146
145	146	145	146	148	147
146	147	146	147	149	148
147	148	147	148	150	149
148	149	148	149	151	150
149	150	149	150	152	151
150	151	150	151	153	152
151	152	151	152	154	153
152	153	152	153	155	154
153	154	153	154	156	155
154	155	154	155	157	156
155	156	155	156	158	157
156	157	156	157	159	158
157	158	157	158	160	159
158	159	158	159	161	160
159	160	159	160	162	161
160	161	160	161	163	162
161	162	161	162	164	163
162	163	162	163	165	164
163	164	163	164	166	165
164	165	164	165	167	166
165	166	165	166	168	167
166	167	166	167	169	168
167	168	167	168	170	169
168	169	168	169	171	170
169	170	169	170	172	171
170	171	170	171	173	172
171	172	171	172	174	173
172	173	172	173	175	174
173	174	173	174	176	175
174	175	174	175	177	176
175	176	175	176	178	177
176	177	176	177	179	178
177	178	177	178	180	179
178	179	178	179	181	180
179	180	179	180	182	181
180	181	180	181	183	182
181	182	181	182	184	183
182	183	182	183	185	184
183	184	183	184	186	185
184	185	184	185		



AMMETER SELECTOR SWITCHES

Legend Plate 75x75mm	Switching Function To read by means of a Single Ammeter	Type	Dim L
	Current through CT's in each Phase with OFF 4 Position 90°	PA6310AM1	62
	Current through CT's in each Phase with OFF 4 Position 90°	PA10310AM2	86
	Current through CT's in each Phase with OFF 4 Position 90°	PA11310AM3	92
	Current through CT's in each Phase with an alternate OFF between 2 Phases. 6 Position 60°	PA6310AM7	62
	Current through CT's in each of 3 Phases, Neutral and out of Balance or Leakage Current with OFF 6 Position 60°	PA10510AM9	86


SCHEMATIC DIAGRAMS: AMMETER SELECTOR SWITCHES

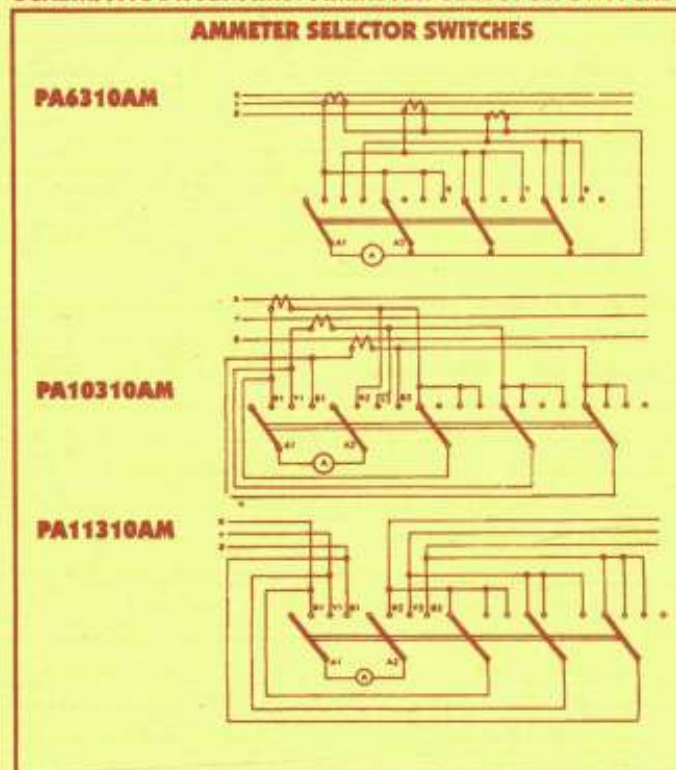

VOLTMETER SELECTOR SWITCHES

Legend Plate 75x75mm	Switching Function To read by means of a Single Voltmeter	Type	Dim L
	Voltage between Phase with OFF 4 Position 90°	PA5310VM1	56
	Voltage between each Phase and Neutral with OFF 4 Position 90°	PA5110VM2	56
	Voltage between Phases and between each Phase and Neutral without OFF 6 Position 60°	PA7410VM6	68
	Voltage between Phases and between each Phase and Neutral with OFF 7 Position 45°	PA9410VM8	80
	Voltage between Phases and between each Phase and Neutral with 2 OFFs 8 Position 45°	PA9410VM9	80

SCHEMATIC DIAGRAMS: VOLTMETER SELECTOR SWITCHES

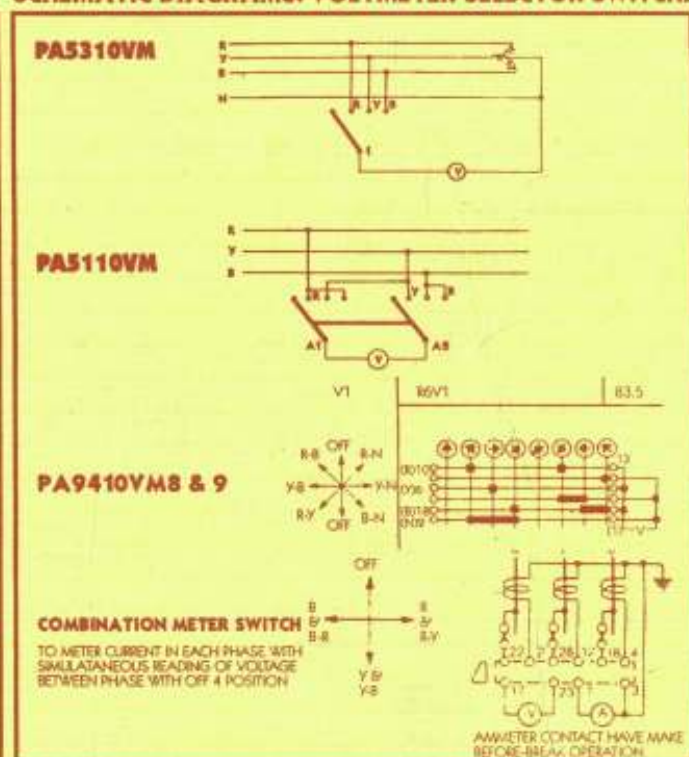


★ Combined Ammeter & Voltmeter Selector Switches are also available in 4, 6 & 8 Posns

★ Non Standard, Taylor made Ammeter & Voltmeter Switches are offered against specific requirement.


DIMENSIONS

PANEL MOUNTING SWITCHES

10—16—20—25 AMPS.

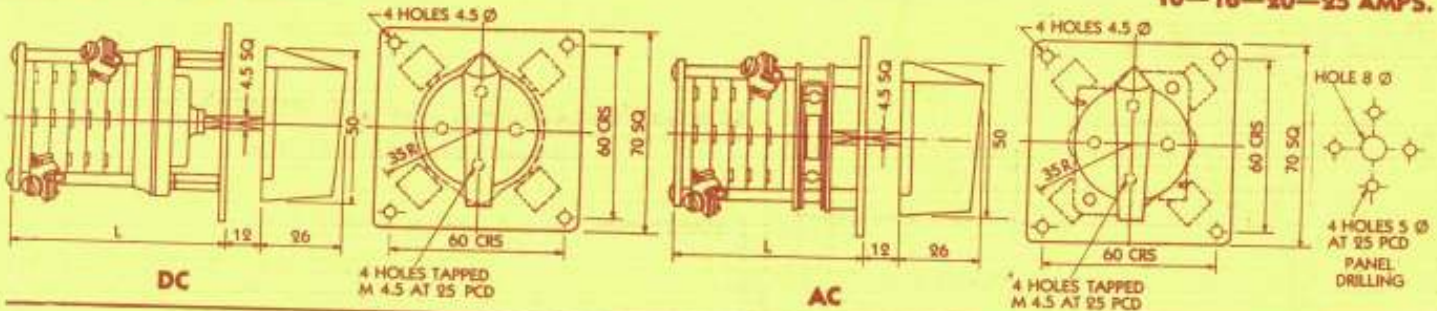


32—40—63—125 AMPS.

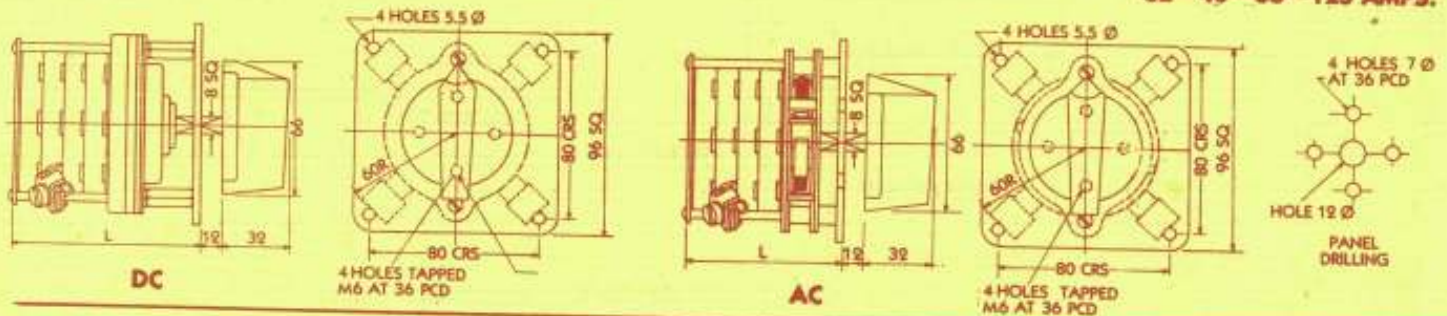



CENTRE KEY LOCK SWITCHES


10 to 125 AMPS. AC & DC 4 POSITION ONLY

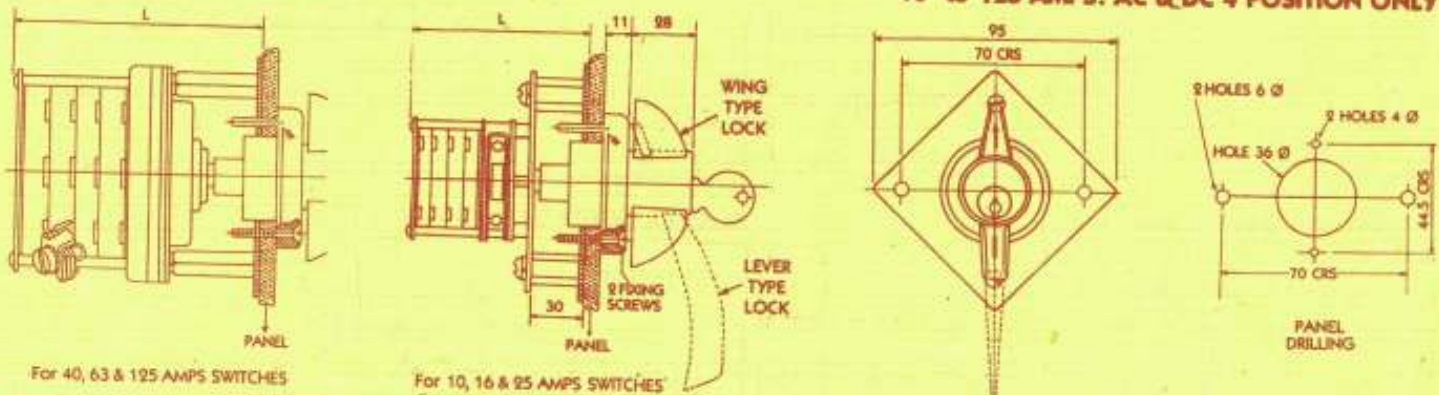

DOOR INTER LOCK SWITCH

10 to 125 AMPS. AC & DC 4 POSITION ONLY

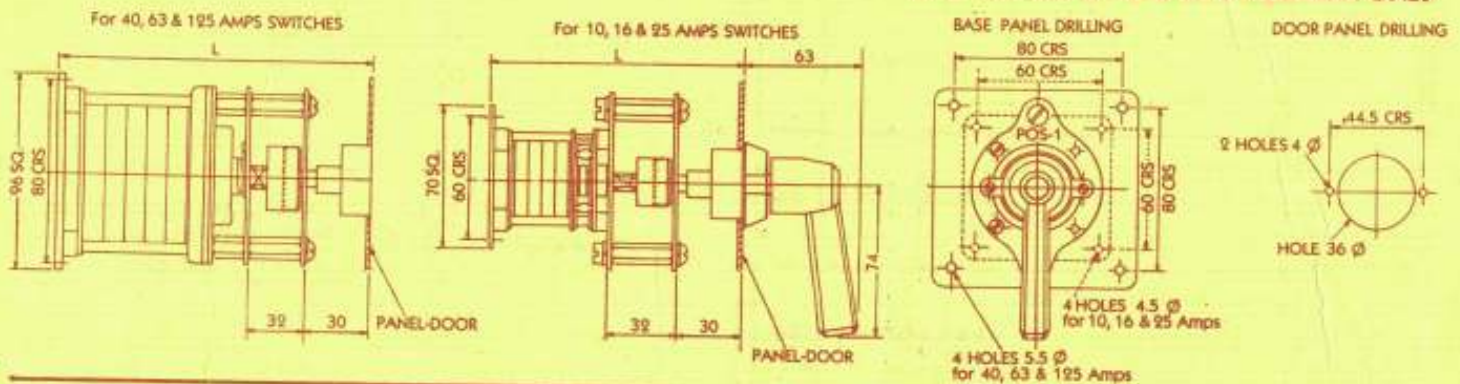Large Frame 16 & 25 Amp.
12 Posn. 30° Indexing A. C. SwitchSmall Frame 5 & 10 Amp.
12 Posn. 30° Indexing A. C. Switch

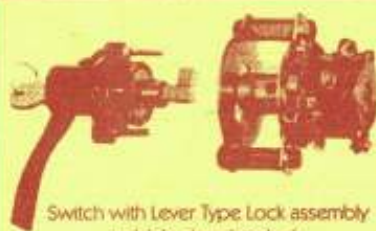


Switch with Lever Type Lock assembly
cubicle door interlock



Large A. C.
mechanism
on small switch
with support bolts



A. C. only switch with
revertible mechanism

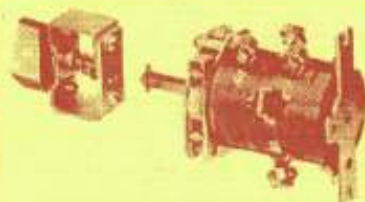

Switch with cubicle door interlock



Large D. C.
mechanism
on small switch
with support bolts



Switch with pinch
screw terminals



Switch with
removable handle



switch with
lever type
lock assembly



Switch with lock
in escutcheon plate



Switch with
spring loaded
(push-turn)
handle



40 Amp. AC/DC
Rly. Junction
Box Switch



Switch with
locked handle



Switch with
double
A. C. mechanism



40 Amp. AC
Rly. Junction
Box Switch



Switch with
watertight
spindlegland



Large D. C.
mechanism
on small switch



Mechanical interlock
between 2 switches



Switch with
signal lamp
in escutcheon
plate



REVERTIBLE MECHANISM "RM" SWITCHES FOR AC & DC APPLICATION

suitable for Breaker Control with lost motion (Bell alarm) contacts & sequence locking Device., Fitted with Pistol Grip Handle or lockable lever handle. Both side spring Return, 90° movement

PISTOL GRIP HANDLE



95x95mm Embossed Ind. Plate
Large DC 7.5/110 V or 2.5A/250V

LEVER HANDLE




75x75mm Embossed Ind. Plate **Base Mounting**
Small DC 3A/110 V or 1A/250 V **Small DC 16A/250 V**

EE TYPE HANDLE



Available in 90 throw on either side of centre posi. in different switching sequences at TRIP - NEUTRAL - CLOSE positions.

CAPSTAIN HANDLE

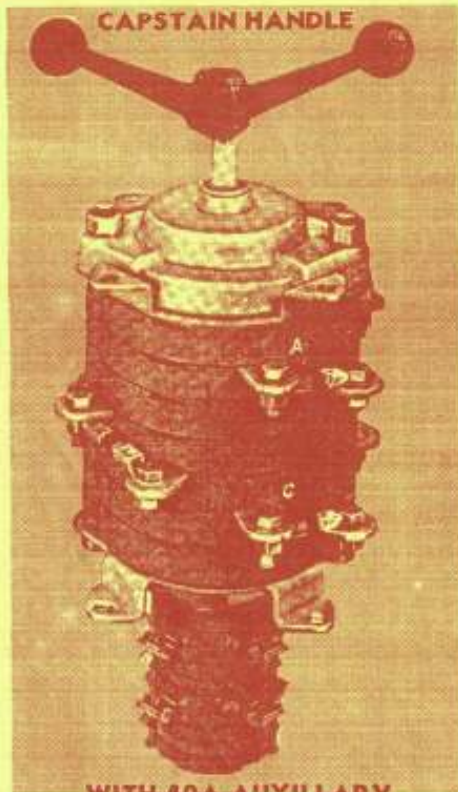

WITH 40A AUXILIARY
CONTACTS SWITCH

200/1000 Amps.
Heavy Duty
AC/DC
Rotary Switches
(Under
Development)

LEVER
HANDLE



UNIVERSAL MOUNTING

RELIABLE ELECTRONIC COMP. PVT. LTD.

Representatives, Dealers & Stockists
located at principal cities of India.
Details of their Name, Address,
Telephone nos. etc., available on request.